

Flowcoat SK



High performance epoxy coating designed for aircraft hanger floors. Excellent chemical resistant epoxy resin coating, resistant to SKYDROL hydraulic fluids.



Chemical Resistance:

Chemically resistant to SKYDROL hydraulic fluids



Hard wearing:

High abrasion and impact resistance



Easy to clean and maintenance:

Seamless and hygienic finish



Grades of slip resistance:

Slip resistant finish can be tailored to specific client requirements

Technical Information¹

REACTION TO FIRE

B_{fl}-s1 EN 13501-1

SLIP RESISTANCE²

Dry > 40 EN 13036-4

TEMPERATURE RESISTANCE

Tolerant up to 70°C

WATER PERMEABILITY

Karsten test - Nil (Impermeable)

SURFACE HARDNESS

> 250 N/mm² EN 13892-6

WEAR RESISTANCE

RWA1 EN 13892-5

COMPRESSIVE STRENGTH

> 80 N/mm² EN 13892-2

FLEXURAL STRENGTH

> 60 N/mm² EN 13892-2

TENSILE STRENGTH

> 15 N/mm² BS 6319

BOND STRENGTH

> 2,0 MPa EN 13892-8

SPEED OF CURE	10 °C	20 °C	30 °C
Light Traffic	48 hrs	16 hrs	12 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	12 days	7 days	7 days

Standard colour chart



Goosewing Grey Beige 326
222

Mid Grey 280

Emerald Green 740



Yellow Grey 217 Yellow 340

Tile Red 637

Sky Blue 452

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office.

¹The figures in the table beside are typical properties achieved in laboratory tests – these results may vary depending on the conditions on the installation site.
²The final anti-slip properties of the floor are influenced by the application method, the size and shape of the aggregate used for the topcoat (aggregate recommendations available from Flowcrete Polska), the degree of abrasion, maintenance and the nature of the dirt.

Model Specification

System:	Flowcoat SK
Finish:	Gloss
Thickness:	approx. 0,35–1,5 mm
Colour:	According to the catalog
Producer:	Flowcrete Group Ltd
Supplier:	Flowcrete Polska Sp. z o.o.
Telephone:	+48 22 879 89 07

Installation Service

The installation should be carried out by a Flowcrete approved contractors with a documented quality assurance scheme. Obtain details of our approved contractors by contacting Flowcrete Polska or enquiring via our website at www.flowcrete.com.pl.

Products Included in this System

Primer (if weak substrate):³	Peran STC or Protop 1000
First layer:	Flowcoat SK; Natural quartz sand 0,2÷0,8 mm (optional)
Second layer:	Flowcoat SK

³ If other resins are used contact Flowcrete Polska for further details.

Detailed application instructions are available upon request.


Aftercare – Cleaning and Maintenance

Clean regularly manually or using a machine in conjunction with a mildly alkaline detergent. Flowcrete Flooring Cleaning Instruction available upon request.

Substrate Requirements

Concrete or screed substrate should be class min. C20/25, a minimum bond strength of 1,5 MPa (pull-off test), surface even, clean, free from laitance, dust and other contamination. All damages in the substrate should be repaired prior to applying the flooring. The substrate should be dry up to 75% RH as per BS 8204 (5% moisture content per weight) and free from rising damp and ground water pressure. In case of higher humidity, one should use Hydraseal DPM as primer. Details to be found in the *Flowcrete Resin Flooring Substrate Requirements*.

System Design

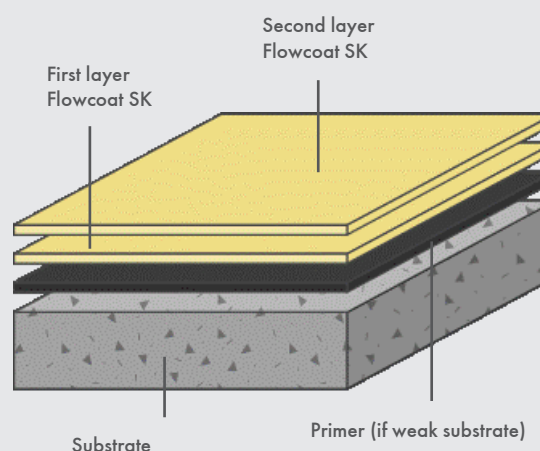

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless, impermeable surface with perfect adhesion to the substrate reduce the need for repairs and maintenance.

Technical information, recommendations and instructions concerning the product use, storage and maintenance included in this System Data Sheet are based on Flowcrete Polska Sp. z o.o. (further related as „Flowcrete“) knowledge and experience, reflecting the best acknowledged way of using the material for a given moment. Taking into consideration other factors that are beyond the producer's control, including differences in quality of substrates, tools and other complementary materials, weather conditions, proper installation and also cleaning and maintenance, Flowcrete cannot take responsibility in case of failure to conform with information and instructions included in this System Data Sheet or, respectively, written recommendations from authorized Flowcrete representatives. One should always conform with up-to-date norms and building principles, and also safety, hygiene and health protection rules according to the information included in Material Safety Data Sheets and also on the products packaging. This System Data Sheet replaces all previous versions. In order to receive up-to-date System Data Sheets contact Flowcrete Polska

[25/01/18]

Flowcrete Central & Eastern Europe
ul. Marywilska 34 03-228 Warsaw Poland
Tel: +48 22 879 8907 Fax: +48 22 879 8918
Email: poland@flowcrete.com

www.flowcrete.com.pl