

## Peran ESD SL



A solvent free resin based floor topping formulated as part of an electrostatic dissipative flooring system.



### Electrostatic Dissipative:

Used in areas where it is necessary to disperse static electricity



### Meets requirements:

Meets anti-static requirements of EN 61340-5-1 and EN 61340-4-5



### Smooth surface:

Waterproof, non-porous surface, easy to clean



### Abrasion resistant:

Used in dry process areas where the floor is subjected to medium to heavy duty foot, trolley, pallet truck and rubber wheeled fork lift traffic

## Technical Information<sup>1</sup>

ELECTRICAL RESISTANCE			
5 X 10 <sup>4</sup> ÷ 10 <sup>6</sup> Ω	EN 61340-5-1		
REACTION TO FIRE			
C <sub>fl</sub> -s1	EN 13501-1		
SLIP RESISTANCE <sup>2</sup>			
Dry > 40	EN 13036-4		
VAPOUR PERMEABILITY			
0,4 g/m <sup>2</sup> /mm/24 h	ASTM E96:90		
TEMPERATURE RESISTANCE			
Up to 60°C			
WATER PERMEABILITY			
Karsten test - Nil (Impermeable)			
WEAR RESISTANCE			
RWA1	EN 13892-5		
FLEXURAL STRENGTH			
> 40 N/ mm <sup>2</sup>	EN 13892-2		
TENSILE STRENGTH			
> 25 N/ mm <sup>2</sup>	BS 6319-7		
IMPACT RESISTANCE			
IR17	EN ISO 6272-1		
BOND STRENGTH			
B2,7	EN 13813		
SPEED OF CURE	10 °C	20 °C	30 °C
Light Traffic	36 hrs	16 hrs	12 hrs
Full traffic	72 hrs	48 hrs	36 hrs
Full chemical cure	12 days	7 days	5 days

## Standard colour chart



Goosewing Grey  
222



Beige 326



Mid Grey 280



Emerald Green 740



Yellow 340



Tile Red 637

The applied colours may differ from the examples shown.  
For a full colour chart and samples, contact your local Flowcrete office.

<sup>1</sup>The figures in the table beside are typical properties achieved in laboratory tests – these results may vary depending on the conditions on the installation site.  
<sup>2</sup>The final anti-slip properties of the floor are influenced by the application method, the size and shape of the aggregate used for the topcoat (aggregate recommendations available from Flowcrete Polska), the degree of abrasion, maintenance and the nature of the dirt.

## Model Specification

<b>System:</b>	Peran ESD SL
<b>Finish:</b>	Gloss
<b>Thickness:</b>	min. 1,5 mm
<b>Colour</b>	According to the catalog
<b>Producer:</b>	Flowcrete Group Ltd
<b>Supplier:</b>	Flowcrete Polska Sp. z o.o
<b>Telephone:</b>	+48 22 879 89 07

## Installation Service

The installation should be carried out by a Flowcrete approved contractors with a documented quality assurance scheme. Obtain details of our approved contractors by contacting Flowcrete Polska or enquiring via our website at [www.flowcrete.com.pl](http://www.flowcrete.com.pl).

## Products Included in this System<sup>3</sup>

<b>Primer:</b>	Peran STC (Protop 1000)
<b>Antistatic Primer</b>	Copper tape; Peran ESD Primer/ Peran ESD Primer WB;
<b>Topping:</b>	Peran ESD SL

<sup>3</sup> If other resins are used contact Flowcrete Polska for further details.

Detailed application instructions are available upon request.


## Substrate Requirements

Concrete or screed substrate should be class min. C20/25, a minimum bond strength of 1,5 MPa (pull-off test), surface even, clean, free from laitance, dust and other contamination. All damages in the substrate should be repaired prior to applying the flooring. The substrate should be dry up to 75% RH as per BS 8204 (5% moisture content per weight) and free from rising damp and ground water pressure. In case of higher humidity, one should use Hydraseal DPM as primer. Details to be found in the *Flowcrete Resin Flooring Substrate Requirements*.

## Aftercare – Cleaning and Maintenance

Clean regularly manually or using a machine in conjunction with a mildly alkaline detergent. Flowcrete Flooring Cleaning Instruction available upon request.

## System Design

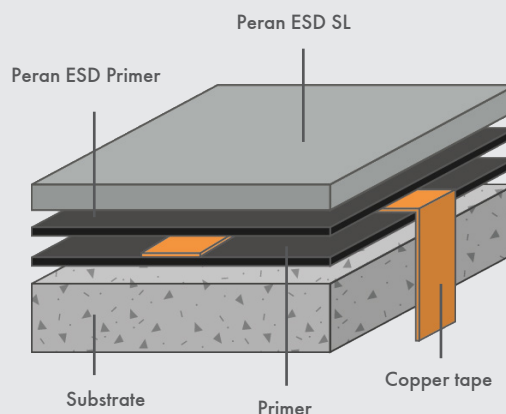

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless, impermeable surface with perfect adhesion to the substrate reduce the need for repairs and maintenance.

Technical information, recommendations and instructions concerning the product use, storage and maintenance included in this System Data Sheet are based on Flowcrete Polska Sp. z o.o. (further related as „Flowcrete“) knowledge and experience, reflecting the best acknowledged way of using the material for a given moment. Taking into consideration other factors that are beyond the producer's control, including differences in quality of substrates, tools and other complementary materials, weather conditions, proper installation and also cleaning and maintenance, Flowcrete cannot take responsibility in case of failure to conform with information and instructions included in this System Data Sheet or, respectively, written recommendations from authorized Flowcrete representatives. One should always conform with up-to-date norms and building principles, and also safety, hygiene and health protection rules according to the information included in Material Safety Data Sheets and also on the products packaging. This System Data Sheet replaces all previous versions. In order to receive up-to-date System Data Sheets contact Flowcrete Polska

[25/01/18]

Flowcrete Central & Eastern Europe  
ul. Marywilska 34 03-228 Warsaw Poland  
Tel: +48 22 879 8907 Fax: +48 22 879 8918  
Email: [poland@flowcrete.com](mailto:poland@flowcrete.com)

[www.flowcrete.com.pl](http://www.flowcrete.com.pl)